

BE1-11t Transformer Protection System



Overview

The BE1-11t Transformer Protection System is designed with many features to address issues with reliability arising from the complexity of programming. With BESTspace™ files, multiple BESTlogic™Plus preprogrammed logic schemes, and associated application notes, you can be confident that you have the complete transformer protection you need.

Features

- Proven algorithms based on more than 50 years of relaying experience and more than 30 years of reliable digital relaying design.
- One relay for most applications.
- One proven, stable firmware package for all BE1-11 series relays.
- Differential protection with dual slope for quick and selective protection against internal faults.
- Advanced differential protection with saturation detection algorithm.
- Automated tap calculation simplifies setup and detailed differential reports provide confirmation of a properly connected relay.
- Transformer through fault monitoring tracks external faults to which the transformer has been subjected to provide data for wear-based maintenance.
- Distance protection option uses calculated fault impedance on a power line to determine fault distance.
- Sync check protection option provides anticipatory closing signals by considering breaker closing time and frequency to minimize closing angle.
- Automatic reclosing option provides for quick re-establishment of power.
- Three Communication Ports: Front USB, rear RS-485 and Ethernet RJ45 or fiber optic are available for BESTCOMSPPlus®, BESTnet™Plus, Modbus®, DNP, and IEC 61850 protocols, also featuring user configurable email notifications.
- Enhanced I/O options available with the J-style case: 10 inputs with 5 outputs or 7 inputs with 8 outputs.

Benefits

- The Offline Simulator, in BESTlogic™Plus, reduces commissioning errors by providing the ability to test and troubleshoot logic without the need for expensive physical hardware.
- Complete transformer protection system for applications including generation step up transformers, intertie installations, network transformers and distribution feeder step down transformers.
- BESTCOMSPPlus® software, provided free of charge, makes it easy to enter protection settings with confidence with its intuitive settings, built-in error checking, and summary screens.
- Complex protection is easy to configure and understand with preprogrammed schemes, drag-and-drop logic, user labels, and notes provided by BESTlogic™Plus.
- Quick and reliable fault clearing with minimal false operations.
- Easily navigate settings and metering with the intuitive HMI menu and large display.
- Customize displayed information to meet different application needs with user-defined indicators and labels.
- Select and Operate buttons, on the front panel, provide direct control of internal logic.
- Optional remote RTD module provides RTDs and analog input and output channels for expanded protection and control possibilities.

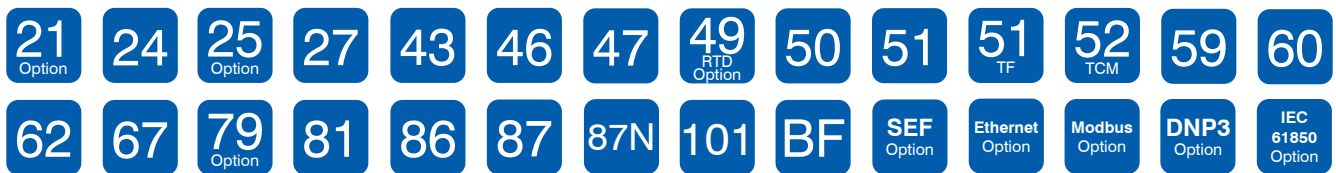


Figure 1 - BE1-11t Device Functions

Specifications

Power Supply

Option 1:	48/125 Vac/dc	dc range 35 to 150 V ac range 55 to 135 V
Option 2:	125/250 Vac/dc	dc range 90 to 300 V ac range 90 to 270 V
Option 3:	24 Vdc	dc range 17 to 32 V*
*(as low as 8 V for momentary dips)		
Burden:	10 W continuous, 12 W max (all options)	

Voltage Sensing (10 to 125 Hz)

Phase:	Metering:	50 to 250 Vac
	Continuous:	300 V, Line to Line
	One-second rating:	600 V, Line to Neutral
Vx:	Metering:	25 to 125 Vac
	Continuous:	150 V, Line to Line
	One-second rating:	600 V, Line to Neutral

Current Sensing (10 to 125 Hz)

5 A Nom:	Metering:	0.5 to 15 Aac
	Continuous:	20 Aac
	One-second rating:	400 Aac
1 A Nom:	Metering:	0.1 to 3 Aac
	Continuous:	4 Aac
	One-second rating:	80 Aac

SEF:	Metering:	0.01 to 3 Aac
	Continuous:	4 Aac
	One-second rating:	80 Aac

Communications

USB:	2.0, Type-B	
RS-485	Baud: Up to 115,200	
	Protocols: DNP Modbus® RTD Module	
Ethernet	Speed: 10/100 Mbit Copper 100 Mbit Fiber	
	Protocols: BESTnet™ Plus BESTCOMSPlus® DNP Modbus IEC 61850™ RTD Module	

Agency/Certifications


UL recognized
CSA certified per Standard C22.2 No. 14
DNP3-2009, V2.6 compliant
KEMA certified per IEC 61850 Certificate Level A
CE and UKCA compliant

Physical

Weight:	5.1 lb (2.3 kg)
IP class:	IP50
Dimensions (WxHxD)	J case: 7.00 x 9.12 x 7.91 inches, with mounting flanges (177.8 x 231.65 x 200.91 mm) 5.33 x 8.41 x 7.29 inches, behind panel (135.38 x 213.61 x 185.17 mm)

For complete specifications, download the instruction manual at www.basler.com.

Style Chart

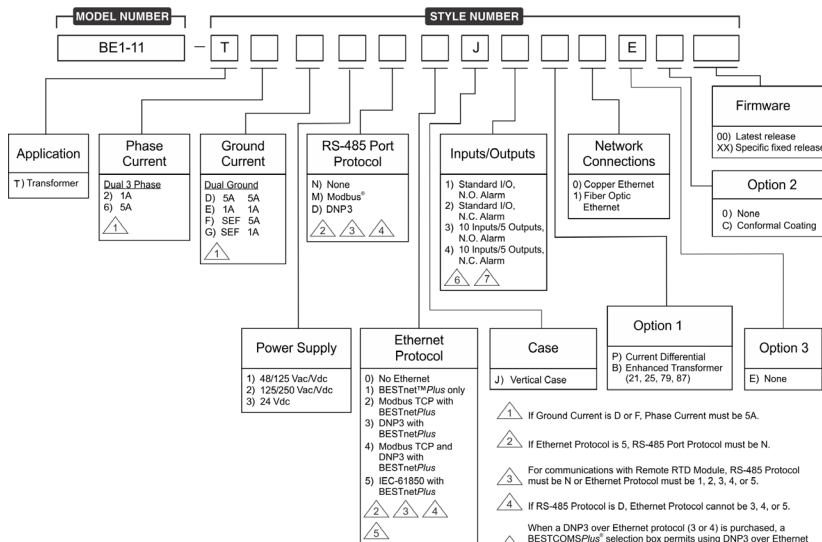

Visit the Basler website!

Scan the QR code for more information on the BE1-11t Transformer Protection System.



Related Products

BE1-FLEX Protection, Automation and Control System

Designed to be configurable for nearly any Power System Application.

DECS-250 Digital Excitation Control System

Provides precise voltage, var and Power Factor regulation, and exceptional system response, plus generator protection.

DGC-2020HD Digital Genset Controller

Provides genset and transfer switch control, metering, protection and programmable logic in a simple, easy-to-use, reliable, rugged, and cost effective package.

RTD Module

Provides up to 12 remote RTD inputs, four remote analog inputs, and four remote analog outputs.

(p/n 9444100100 - Ethernet, Copper)

(p/n 9444100101 - Dual Ethernet, Fiber & Copper)

Accessories

Test terminal block assembly kit for J case systems (p/n 9424226100)