

## Overview

A highly advanced integrated genset control system, this device provides genset control, transfer switch control, metering, protection, and programmable logic in a simple, easy-to-use, reliable, rugged, and cost effective package.

## Features

- Generator metering (includes three-phase mains)
- Engine and generator protection: 27, 32R, 40Q, 59, 810/U
- Optional enhanced generator protection: 47, 51, 78, and 81ROCOF
- BESTCOMSPlus® Software
  - Programming and setup
  - Intuitive and powerful
  - Remote control and monitoring
  - Programmable logic
  - USB communications
- Automatic transfer switch control
- Automatic synchronizer (optional)
- Exercise timer
- SAE J1939 engine ECU communications
- Automatic generator configuration detection
- Expandable functionality via add-on modules
  - [CEM-2020 Contact Expansion Module](#)
  - [AEM-2020 Analog Expansion Module](#)
- Multilingual capability
- Remote communications to Basler's RDP-110 (remote display panel)
- Sixteen programmable contact inputs
- Up to 15 contact outputs: 3 contacts rated for 30 Adc and up to 12 programmable contacts rated for 2 Adc

## Benefits

- Provides integrated engine-genset control, protection, and metering in a single package.
- The Offline Simulator, provided in BESTlogic™ Plus, helps test and troubleshoot logic without the need for expensive hardware.
- Flexible programmable logic and programmable I/O make it easy to expand the DGC-2020's inputs and outputs with the CEM-2020 (Contact Expansion Module) and the AEM-2020 (Analog Expansion Module). This saves time and money by eliminating unnecessary external PLCs and control relaying.

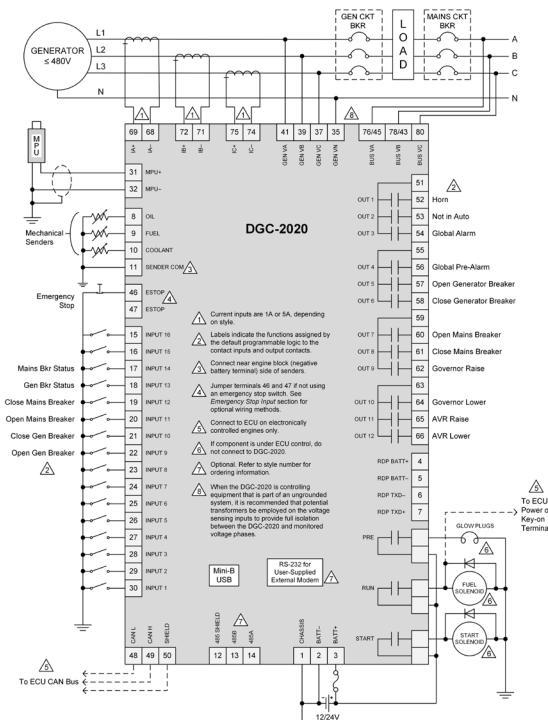


Figure 1 - DGC-2020 Connection Diagram for a Typical Application

## Specifications

### Power Supply

Nominal:	12 or 24 Vdc
Range:	6 to 32 Vdc
Battery Ride Through:	Starting at 10 Vdc, withstands cranking ride-through down to 0 V for 50 ms

### Power Consumption

Sleep Mode:	5 W
Normal Operation:	7.9 W
Maximum:	14.2 W

### Current Sensing

1 A Sensing:	0.02 to 1.0 Aac, continuous 2 Aac for 1 second
5 A Sensing:	0.1 to 5.0 Aac, continuous 10 Aac for 1 second
Burden:	1 VA

### Voltage Sensing

Range:	12 to 576 Vrms L-L
Frequency Range:	10 to 72 Hz for 50/60 Hz style, 10 to 480 Hz for 400 Hz style
Burden:	1 VA
One-second Rating:	720 Vrms

### Contact Sensing

Contact Inputs (16):	Accepts normally open (N.O.), Dry Contacts, programmable
Emergency Stop:	Normally closed (N.C.), Dry Contact

### Engine Speed Sensing

Magnetic Pickup	
Voltage Range:	6 to 70 Vpp
Frequency Range:	32 to 10,000 Hz
Generator Frequency	
Generator Voltage Range:	12 to 576 Vrms via ECU over J1939

### Resistive Senders

Fuel Level Sender:	0 to 250 ohm nominal
Coolant Temp Sender:	10 to 2,750 ohm nominal
Oil Pressure Sender:	0 to 250 ohm nominal

### Output Contacts

Fuel Solenoid, Engine Crank,	
Pre-Start Relays Rating:	30 Adc at 28 Vdc- make, break, and carry
Programmable Relays:	Up to 12
Rating:	2 Adc at 28 Vdc-make, break, and carry

### Protection

Generator:	27, 32R, 40Q, 59, 810/U (standard) 47, 51, 78, 81, ROCOF (optional)
Engine:	Oil pressure, coolant temperature, overcrank, ECU-specific elements, and diagnostic reporting.

### Agency Approvals

UL recognized (Canadian and US safety standards),  
UL 6200:2019 recognized, NFPA compliant,  
CE compliant, UKCA compliant, China RoHS compliant

### Communication

USB Port:	USB 2.0, Mini-B jack
RS-485 (optional):	9600 baud, 8 data bits, no parity
RDP-110 (optional):	4,000 ft (1,219 m) max wire length, 20 AWG (0.52 mm <sup>2</sup> ) min wire size
Modem (optional):	DB-9 connector (male)
CAN Bus:	250 kb/s communication rate, 1.5 to 3 Vdc differential bus

### Environmental

Operating Temp:	-40°C to 70°C (-40°F to 158°F)
Storage Temp:	-40°C to 85°C (-40°F to 185°F)
Humidity:	IEC 68-2-38
Salt Fog:	ASTM B 17-73, IEC 68-2-11
Ingress Protection:	IEC IP54 for front panel
Shock:	15 G in three perpendicular planes

### Vibration

5 to 29 Hz:	1.5 G peak
29 to 52 Hz:	0.036" (0.914 mm) double amplitude
52 to 500 Hz:	5 G peak

### Physical

Weight:	4.4 lb (2 kg)
Dimensions (WxHxD):	11.77 x 8.27 x 2.69 inches (299 x 210 x 69 mm)


For complete specifications, download the instruction  
manual at [www.basler.com](http://www.basler.com).

Visit the Basler website!

Scan the QR code for  
more information on the  
DGC-2020 Digital Genset  
Controller.



## Style Chart

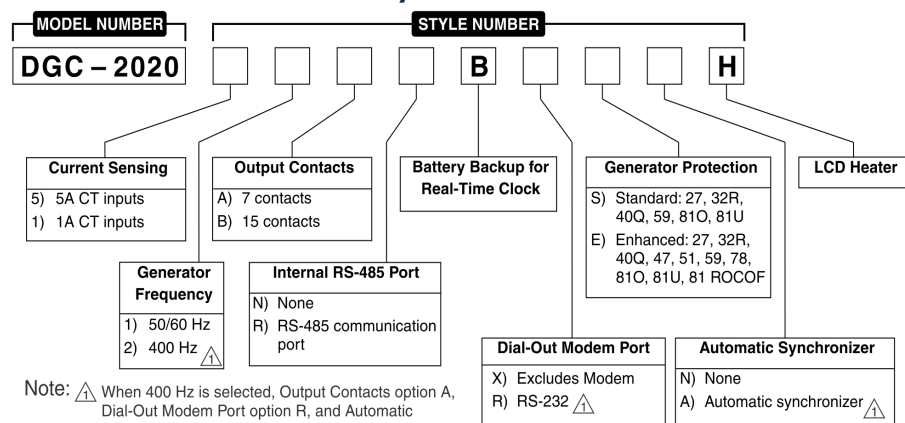

## Related Products

### BE1-FLEX Protection, Automation and Control System

Designed to be configurable for nearly any Power System Application.

### DECS-250 Digital Excitation Control System

Provides precise voltage, var and Power Factor regulation, and exceptional system response, plus generator and motor protection.

## Accessories

### AEM-2020 Analog Expansion Module

Easily increases the functionality by seamlessly adding analog inputs and outputs.

### CEM-2020 Contact Expansion Module

Each module adds 10 inputs and 24 outputs that are easily programmed through BESTCOMSPUs<sup>®</sup> for easy integration into the system.

### RDP-110C Remote Display Panel

Provides remote alarm and pre-alarm indication and annunciation of system status, easily meeting the annunciation requirements of NFPA-110 applications.