

# Model 6010

6"  
DN150

**FPE**

**Fluid  
Power  
Energy**

## Three-Way Thermostatic Valves

**3D  
Model  
Link**

### Compact and Reliable Temperature Control

Fluid Power Energy (FPE) thermostatic valves utilize the principle of expanding wax, which in the semi-liquid state undergoes large expansion rates within a relatively narrow temperature range. The self-contained element activates a stainless steel sleeve, which directs flow. All FPE thermostatic valves are factory set at predetermined temperatures: no further adjustments are necessary.

When used in a diverting application, on start-up the total fluid flow is routed back to the main system. As fluid temperature rises to the control range, some fluid is diverted to the cooling system. As fluid temperature continues to increase, more flow is diverted. When the thermostat is in a fully stroked condition, all fluid flow is directed to the cooling system.

FPE thermostatic valves may also be used in a mixing application. Hot fluid enters the "B" port and colder fluid enters the "C" port. The flows mix and the thermostat adjusts flow through ports "B" and "C" to reach the desired temperature, exiting the "A" port.

Standard FPE thermostatic valve housings are made from aluminum and grey iron castings, however, ductile iron, bronze, steel and stainless steel housings are available.



### Including:

6010	6" Flange ANSI 125
6010M	6" Flange, lever manual override
6010MZ	6" Flange, nut manual override
6010U	6" Flange DN/PN
6010UM	6" Flange DN/PN, lever manual override
6010UMZ	6" Flange DN/PN, nut manual override
6010XM	6" Flange ANSI 300, lever manual override
6010XMZ	6" Flange ANSI 300, nut manual override

Flange options available

### Features and Benefits

- Wide range of temperatures
- Heavy duty
- Self-contained
- Replaceable element
- Non-adjustable
- Rugged construction
- Tamper-proof
- Operate in any orientation
- Compact

[www.FPEvalves.com](http://www.FPEvalves.com)

EUROPE, MIDDLE EAST,  
AFRICA, ASIA + PACIFIC  
+44 1733 206 678  
[emeaap@FPEvalves.com](mailto:emeaap@FPEvalves.com)

AMERICAS  
+1 262 548 6220  
[americas@FPEvalves.com](mailto:americas@FPEvalves.com)


CHINA  
+86 0519 8158 0102  
[china@FPEvalves.com](mailto:china@FPEvalves.com)

# Model 6010 Three-Way Thermostatic Valve Specifications

All units in inches (mm) or lbs (Kg); English (metric)

Model Number	Body Material*	Connection Size	Principal Dimensions Units inches (mm)					Flange Drilling			No. of elements
			X	Y	W	Z	V	No. of holes	Dia. of holes	Bolt circle	
*6010 *6010M *6010MZ	A	6" 125lbs FF FLANGE	N/A	9 5/8 (244)	19 1/4 (488)	10 (254)	16 (406)	8	7/8 (22)	9 1/2 (241)	9
	B	6" 150lbs FF FLANGE	N/A	9 7/16 (239)	18 7/8 (479)	9 13/16 (249)	16 (406)	8	7/8 (22)	9 1/2 (241)	9
	D	6" 150lbs FF FLANGE	N/A	9 5/8 (244)	19 1/4 (488)	10 (254)	16 (406)	8	7/8 (22)	9 1/2 (241)	9
	S, SS	6" 150lbs RF FLANGE	N/A	9 4/8 (241)	19 (482)	9 15/16 (252)	16 (406)	8	7/8 (22)	9 1/2 (241)	9
*6010U *6010UM *6010UMZ	A	150DN PN10/16 RF FLANGE	N/A	9 5/8 (245)	19 5/16 (490)	10 (254)	16 (406)	8	29/32 (23)	9 7/16 (240)	9
	B	150DN PN10/16 RF FLANGE	N/A	9 1/2 (241)	19 (482)	9 7/8 (250)	16 (406)	8	29/32 (23)	9 7/16 (240)	9
	D	150DN PN10/16 RF FLANGE	N/A	9 5/8 (245)	19 5/16 (490)	10 (254)	16 (406)	8	29/32 (23)	9 7/16 (240)	9
	S, SS	150DN PN10/16 RF FLANGE	N/A	9 7/16 (239)	18 7/8 (479)	9 14/16 (250)	16 (406)	8	29/32 (23)	9 7/16 (240)	9

Replace \* with body material type: A = Cast iron, B = Bronze, D = Ductile iron, S = Steel, SS = Stainless Steel.

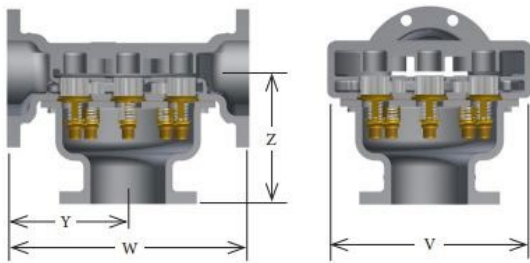



Pressure ratings @ 250°F					
Material	A	B	D	S	SS
psi	175	195	225	245	225
Bar	12.0	13.4	15.5	16.9	15.5

Weight			
A	B	D	S & SS
218 (99)	260 (118)	211 (96)	196 (89)

Service Kits (xxx represents temperature °F) Model	xxx represents temperature °F				Thermostat	Override Kits	
	O-Ring	Gasket	Lip Seal	Lever		Nut	
6000-xxx	1 of Buna-N	1	9	9	6000M-xxx	6000MZ-xxx	
6000V-xxx	1 of Viton	1	9	9	6000MV-xxx	6000MZV-xxx	
6000E-xxx	1 of Neoprene	1	9	9	6000ME-xxx	6000MZE-xxx	

Lip Seal Insertion Tools	
Part Number	Component
2071-IT	Lip Seal Insertion Plug

Lip Seal Extraction Tools	
Part Number	Component
2071-RT	Lip Seal Extraction Plug

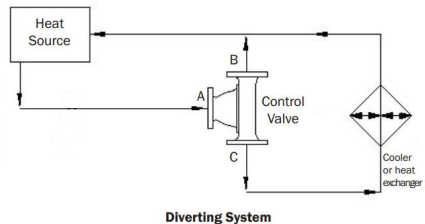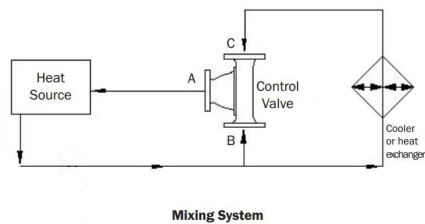

NOTE: Service Kits are supplied with Housing O-Rings & Housing Gaskets. Make sure to replace your original housing seal using the same style seal, and discard the extra component. If your valve was originally supplied with a gasket, DO NOT attempt to use an O-Ring, as the seal will leak without a groove to accept the O-Ring

Note: FPE reserves the right to substitute ordered material for better quality.

[www.FPEvalves.com](http://www.FPEvalves.com)

EUROPE, MIDDLE EAST,  
AFRICA, ASIA + PACIFIC  
+44 1733 206 678  
[emeap@FPEvalves.com](mailto:emeap@FPEvalves.com)

AMERICAS  
+1 262 548 6220  
[americas@FPEvalves.com](mailto:americas@FPEvalves.com)

CHINA  
+86 0519 8158 0102  
[china@FPEvalves.com](mailto:china@FPEvalves.com)